




PLASMA POP-UP LIFT SPECIFICATIONS

- HELIARC WELDED STRUCTURAL ALUMINUM CONSTRUCTION
- STEEL RAILS WITH PRECISION NEEDLE BEARING GUIDES
- SMOOTH RACK & PINION GEAR DRIVE
- LAND OR MARINE YACHT CAPABLE
- QUALITY THROUGHOUT


NOTE:

THE PLATFORM CAN BE SET TO SAFELY OVER-RUN THE RAILS BY 1/4" AT EACH END OFFERING 1/2" ADDITIONAL TRAVEL



NOTE:

TRAVEL STOPS AT TOP AND BOTTOM OF RAIL FOR CONVENIENT TRAVEL ADJUSTMENTS.

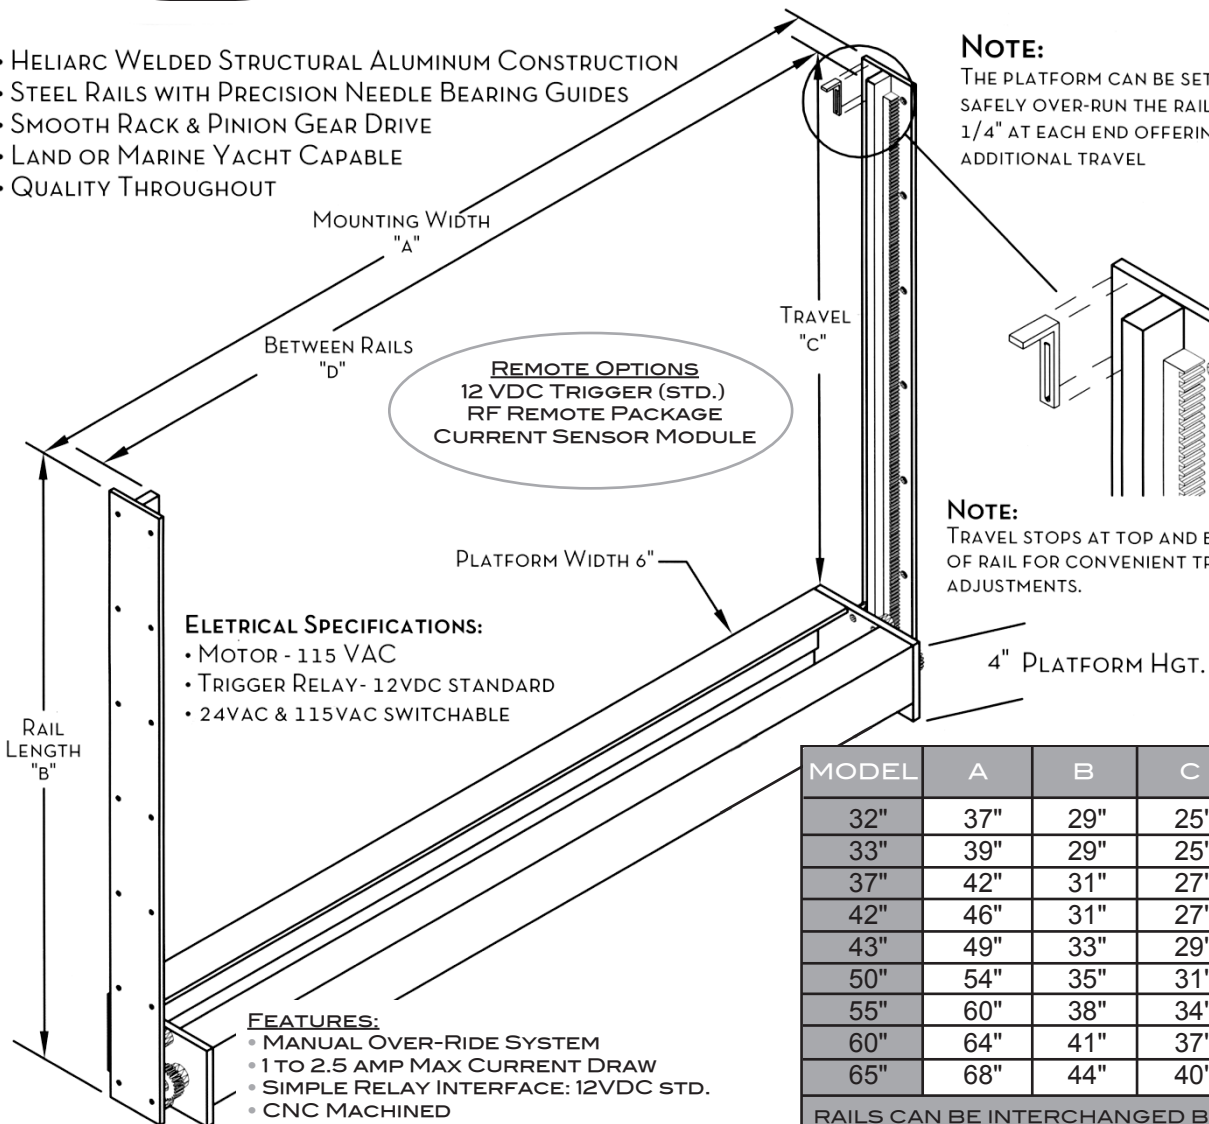

REMOTE OPTIONS
 12 VDC TRIGGER (STD.)
 RF REMOTE PACKAGE
 CURRENT SENSOR MODULE

ELETRICAL SPECIFICATIONS:

- MOTOR - 115 VAC
- TRIGGER RELAY - 12VDC STANDARD
- 24VAC & 115VAC SWITCHABLE

FEATURES:

- MANUAL OVER-RIDE SYSTEM
- 1 TO 2.5 AMP MAX CURRENT DRAW
- SIMPLE RELAY INTERFACE: 12VDC STD.
- CNC MACHINED
- POWER OUTLET PROVIDED FOR TV HOOK-UP
- SMOOTH-QUIET FUNCTION

MODEL	A	B	C	D
32"	37"	29"	25"	34 1/2"
33"	39"	29"	25"	36 1/2"
37"	42"	31"	27"	39 1/2"
42"	46"	31"	27"	43 1/2"
43"	49"	33"	29"	46 1/2"
50"	54"	35"	31"	51 1/2"
55"	60"	38"	34"	57 1/2"
60"	64"	41"	37"	61 1/2"
65"	68"	44"	40"	65 1/2"

RAILS CAN BE INTERCHANGED BETWEEN SIZES - CUSTOM SIZES AVAILABLE